

Warning

- Please be sure to perform the installation and assembly based on this manual. Incorrect installation or assembly will be the cause of injury.
- Please have 2 or more persons lift the Copyboard when installing or removing it.
- For details on installation, also refer to the copyboard's "User's Manual" and "Assembly and Setup Manual".

STAND PACKAGING LIST

Please open the carton and check the parts.

In the rare event that something is missing, please contact your store of purchase.

T-shape legs (with casters): × 2, horizontal bars × 2, Frame caps × 2, Pipe caps × 4, lock-screws × 2, hexagonal socket screws × 8, flat washers × 8, hexagonal wrench × 1, Stay × 1

ASSEMBLY OF THE STAND


(1) Push the pipe caps into the front and back of the T-shape legs. (2 pipe caps)

(2) Push the caps into the tops of the T-shape legs. (2 caps)

(3) Attach the two horizontal bars to the T-shape legs.

Use hexagonal socket screws and flat washers to attach. Partially fasten using the supplied hexagonal wrench, then tighten securely after the upper and lower horizontal bars have been attached.

* Assemble in a flat place.

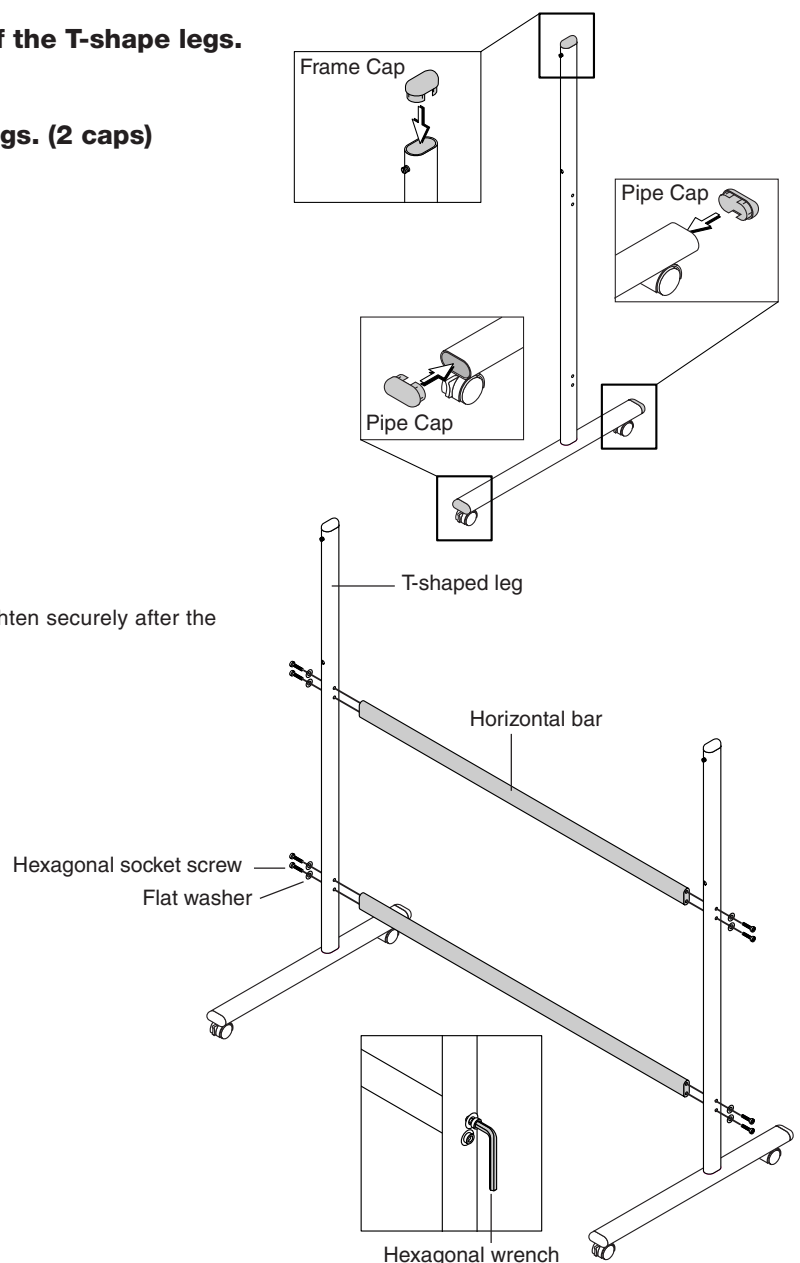

(4) Mount the printer tray to the Copy- board.

See Page 9 for information about the assembly and installation of the printer tray.


* Installation of the printer tray is not required when the Copyboard is used only for memory storage.

(5) Place the stand's hooks in the mounting holes in the support fittings and insert the grooves in the hooks securely.

There are 3 hole positions. By changing the position, the installation height can be changed among 3 levels in 100 mm units (1770, 1870, and 1970 mm (the maximum height)).

(6) Insert the stay between the printer tray and stand.


- ① Tilt the bottom of the main unit slightly forwards and insert the stay between the printer tray and pipe.
- ② Pushing the main unit back towards the stand, insert the groove in the stay into the printer tray.

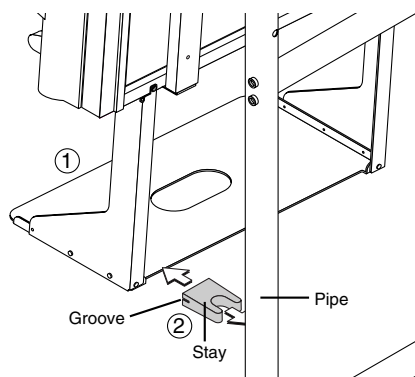

Note

Check again that the grooves in the stand's hooks are securely inserted in the mounting holes in the support fittings.

(7) Lock the main unit and stand with the two locking knobs.

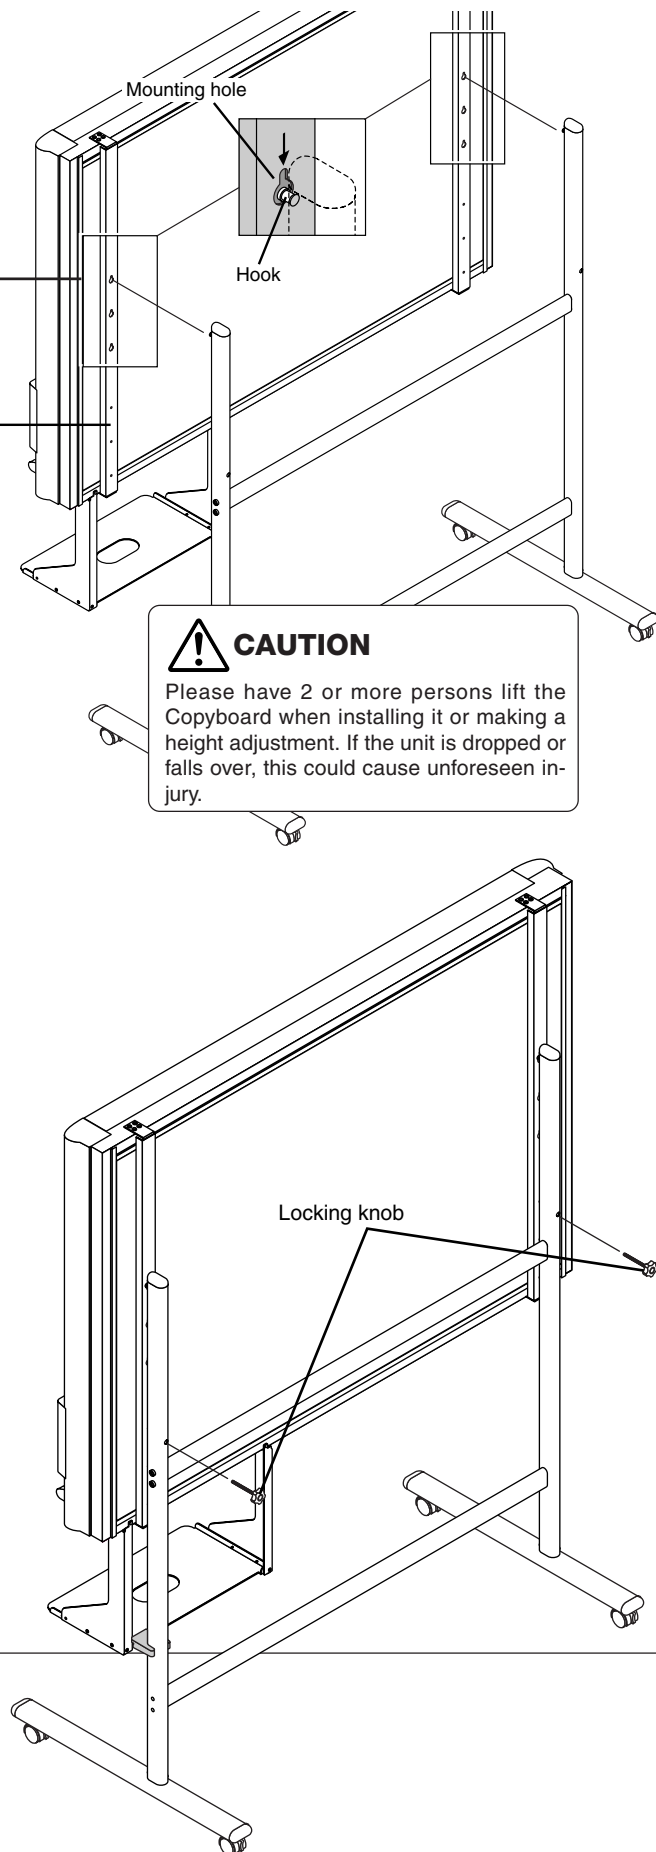

CAUTION

Please have 2 or more persons lift the Copyboard when installing it or making a height adjustment. If the unit is dropped or falls over, this could cause unforeseen injury.

PLUS Vision Corp.

20-11, Otowa 1-chome, Bunkyo-ku, Tokyo, 112-0013 JAPAN

www.plus-vision.com

[email:plusvision@plus.co.jp](mailto:plusvision@plus.co.jp)



Iruma Factory of PLUS Vision Corp. is
certified to ISO 9001.
Certificate No. 12 100 17398 TMS



Otowa Head Office and PLUSLAND of PLUS Corporation,
and Iruma Office/Iruma Factory of PLUS Vision Corp. are
certified to ISO 14001.
Certificate No. NQE-9809008A

*PLUS Vision Corp. is certified to ISO 14001 as a member of the PLUS group.