



Engineering Change Notice		#: DST-10054E Date: 4 Sep 2015 Approved by: T.Kawano–Quality Assurance Issued by: Tak Inoue – International Sales	
Product	Copyboard	Model	N/C-20 series
Change	Net2Print (Printer Server Software) ver.1.0.5.1 release		
Reasons	To enhance printer connectivity using LAN environment on Network Boards		
Schedule	By this release of software		
Methods	Distribution limited to contents server download for dealers		
<p>[Details of the change]</p> <p>To enhance the printer connectivity for network copyboards, we have optimized network printer App (currently attached to N31 series) to enable N/C-20 series copyboards to print to any usable network printer via PC on LAN.</p> <p>This App will automatically create Help file in the folder such as: C:\Program Files (x86)\PLUS Networkboard\Printer Server for PLUS Copyboard (in case of Windows8)</p> <p>You can refer to the chm HELP file created in the folder for the functionality of this App. (N20 series does not appear in the supported product column as we do not announce this to the user level)</p> <p>Note: This App only accepts JPEG file format from the networkboard, please set the saving file format only to Jpeg when this App is used. JPEG may be resulted in lesser image quality than PNG and PDF files.</p> <p>Note: When installing this App to a PC, Windows error may occur if the Windows is not updated.</p> <p>Note: Depending on the OS language, this App will be installed in either English or German or Simplified Chinese.</p> <p>*Contents server: https://www.plus-vision.co.jp/dx/ns/plus/ can be entered with your ID and password.</p>			

How to use Net2Print (Printer Server for PLUS Copyboard App)

1. Check the IP address that appears in the Printer Server for PLUS Copyboard pop up window by double-clicking the icon in the task tray. This is the IP address of your PC. (Port: 21, User Name: admin, Password: pass are default value Printer: Current network printer connected to the PC)

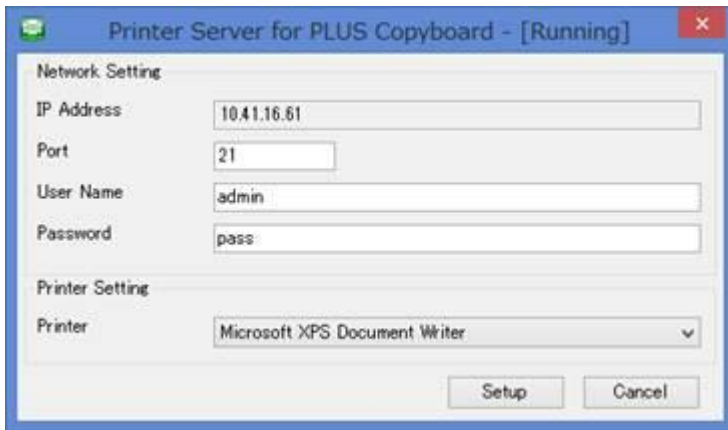

2. Input the checked IP address in the Printer IP address in the Network Printer Setting Menu. Select JPEG only in the Graphic File Format. Caution: PDF and PNG do not work with this App.

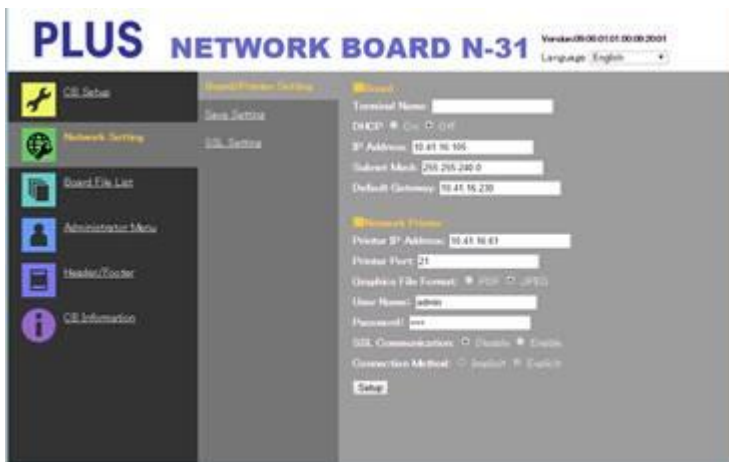

3. By pressing Network button, you can print the writings on the board from the already assigned printer on LAN as far as the PC is powered ON. Printer Server for PLUS Copyboard App works on the background and there is no need to touch the PC.

